

LIFTING ATTACHMENTS

SPREADER BEAM



- Capacity to 100t.
- Straight or H configuration available.
- Standard or close coupled headroom designs available.
- Custom beams to suit any application.
- Fully certified chains and shackles used throughout.



- Sign written to AS4991-2004
- Durable high visibility yellow paint finish. (Other colours optional)
- Fully welded construction to AS1554.1-2004
- Design fully compliant with AS4991-2004


C-HOOKS



- Capacity from 1 tonne to 32 tonne.
- Counterbalanced design, ensures c-hook remains level when loaded or unloaded.
- Nylon lined lifting surface for smooth engagement and prevention of damage to valuable product.
- Radiused lifting arm to ensure stable location on inner diameter of coil.

- Sign written to AS4991-2004
- Durable high visibility yellow paint finish (other colours optional)
- Fully welded construction to AS1554.1-2004
- Design fully compliant with AS4991-2004
- Fully compatible with our motorised rotating hook block range for


TONGS

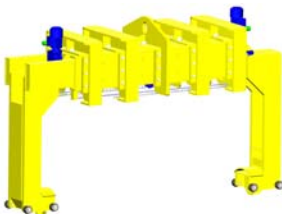

- Capacity up to 25 tonne.
- Fully balanced design ensures tong remains level at all states of loading.
- Motorised adjustable tine crs from 600mm to 2600mm to suit a vast range of coil widths.
- Laser guidance system to assist with accurate location on coils.
- Radiused lifting feet to ensure stable location on inner diameter of coil.

- Sign written to AS4991-2004
- Durable high visibility yellow paint finish. (Other colours optional)
- Fully welded construction to AS1554.1-2004
- Design fully compliant with AS4991-2004
- Fully compatible with our motorised rotating hook block range for the ultimate hands free operation.

CONTAINER LIFTER

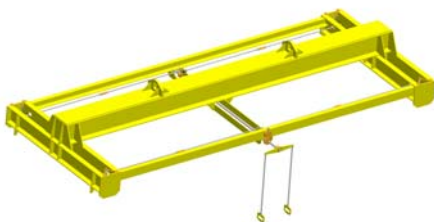

- Capacity up to 32 tonne.
- Standard twist lock interface with 20 foot containers.
- Economical single point hand powered engagement of twist locks.
- Forged twist locks used for high strength and wear resistance.
- Suitable for twin hoist or single hoist (with chain sling) lifting.



- Sign written to AS4991-2004
- Durable high visibility yellow paint finish. (Other colours optional)
- Fully welded construction to AS1554.1-2004
- Design fully compliant with AS4991-2004