




# JDN MONOCRANE

## ROLLERS AND AXLES

**JDN MONOCRANE** rollers and axles are machined from K1045 to provide durability as well as good wear characteristics.

Rollers are fitted standard with shielded deep groove ball bearings and can be flame hardened if required.

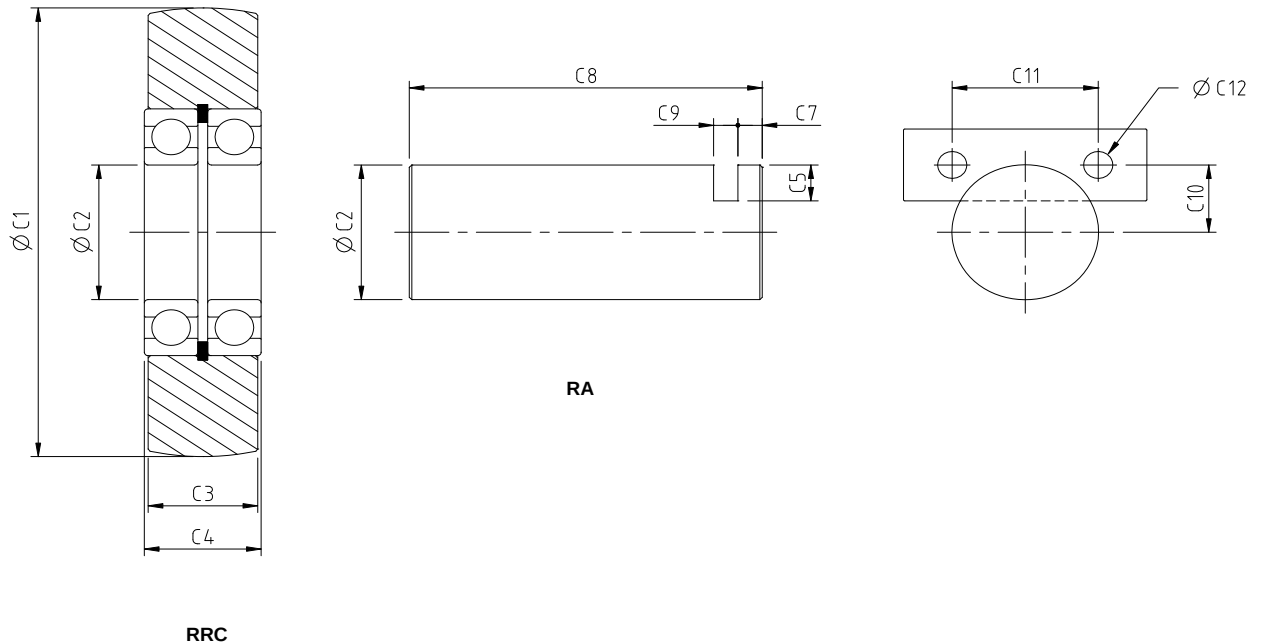

| ROLLER<br>PART No | C1  | C2 | C3 | C4   | AXLE<br>PART No | C5 | C7 | C8  | C9 | KEEPER PLATE<br>PART No | C10 | C11 | C12 |
|-------------------|-----|----|----|------|-----------------|----|----|-----|----|-------------------------|-----|-----|-----|
| JO90RRC           | 90  | 30 | 26 | 34   | JO90RA          | 10 | 10 | 90  | 10 | AXLPDW150               | 21  | 40  | M8  |
| J120RRC           | 120 | 40 | 30 | 38.5 | J120RA          | 10 | 10 | 90  | 10 |                         | 26  | 40  | M8  |
| J150RRC           | 150 | 40 | 30 | 38.5 | J150RA          | 10 | 10 | 130 | 10 |                         | 26  | 40  | M8  |
| J180RRC           | 180 | 50 | 34 | 43   | J180RA          | 16 | 10 | 130 | 10 | AXLPDW200               | 25  | 60  | M12 |
| J200RRC           | 200 | 60 | 45 | 48   | J200RA          | 16 | 10 | 145 | 10 |                         | 30  | 60  | M12 |

\* All dimensions in mm and subject to change without notice.

| WHEEL CAPACITIES PER WHEEL kgs |       |       |       |
|--------------------------------|-------|-------|-------|
| PART No                        | M3/M4 | M5/M6 | M7/M8 |
| JO90RRC                        | 2000  | 1600  | 1250  |
| J120RRC                        | 4000  | 3200  | 2000  |
| J150RRC                        | 6300  | 5000  | 4000  |
| J180RRC                        | 8000  | 6300  | 5000  |
| J200RRC                        | 10000 | 8000  | 6300  |